



MODEL 216

SECTIONAL STEEL DOORS



WAYNE DALTON COMMERCIAL DOORS

Designed to meet the needs of the most rugged applications

Wayne Dalton's Model 216 Sectional Steel door features heavy-duty 16-gauge construction built to withstand severe weather, brutal use and exposure to security hazards.

A variety of insulation and lite options are available for the Model 216, which is also available in a wide range of sizes.

- ▶ RUGGED 16-GAUGE STEEL CONSTRUCTION
- ▶ STANDARD SIZES UP TO 28' 2" WIDE AND 18' 1" HIGH
- ▶ SHIPLAP JOINT PROFILE



Standard Features Overview

THERMAL EFFICIENCY

R-value*	7.64 (with optional insulation)
U-value	0.13 (with optional insulation)

CONSTRUCTION

Max Width	28'02"
Max Height	18'01"
Exterior Steel	16-gauge
Exterior Surface	Smooth, ribbed
Joint Profile	Shiplap
Standard Springs	10,000 cycles

COLOR OPTIONS	White
----------------------	-------

WARRANTY	One (1) year limited
-----------------	----------------------

Options

- Chain Hoist Operation
- Motor Operation
- High Cycle Spring (25K, 50K, 100K)
- 3" Track Option
- Solid Shafts
- Perimeter Weatherseal
- Broken Cable Devices
- Safety Edges
- Safety Photo Eyes
- Special Track Designs
- Pass Doors
- Mullions

The Wayne Dalton Model 216 steel sectional door is engineered to perform, even in the most punishing environments.

Whether subjected to severe weather, rough use or security hazards, the Model 216 will stand the test of time.

Materials and Construction

Industrial-duty 16-gauge hot-dipped galvanized steel sections are reinforced with heavy duty vertical stiles on the interior of the Model 216. Complete with prelocated extruded mounting holes, these 16-gauge C-shaped stiles make hinge installation quick and secure.

Bottom sections feature a flexible bulb-shaped vinyl astragal held in place by a continuous roll-formed steel retainer that reinforces the lower portion of the door at the same time.

Additional options include top head seal, joint seals and jamb seals. Optional insulation, consisting of 1 9/16" expanded polystyrene or urethane and covered with .022" minimum embossed pre-painted white steel provides an R-value of up to 7.64 and a U-value as low as 0.13. Lite options include insulated or non-insulated factory-glazed lites or complete aluminum full-view sections for maximum visibility. Operators can also be specified for use with the Model 216.

Contact Wayne Dalton for additional sizes and colors.




*Wayne Dalton uses a calculated door section R-value for our insulated doors

MODEL 216



Color Options



White

Lite Options



Vision lites



Full-view lites

Optional polystyrene
insulation sealed between door panel
and embossed steel backing cuts
heating/cooling cost



Model 216
flush profile with
shiplap joint



General Operating Clearances

Type	Headroom		Sideroom		Depth into Room	Center Line of Springs	
	2" Track	3" Track	2" Track	3" Track	2" and 3" Track	2" Track	3" Track
Standard Lift Manual 12" R	13'-17"	NA	4.5"	5.5"	Opening Height +18"	Opening Height +12"	N/A
Standard Lift Manual 15" R	15'-20"	16"-21"				Opening Height +13"	Opening Height +14"
Standard Lift Motor Oper. 12" R	15'-20"	NA			Opening Height +66"	Opening Height +12"	N/A
Standard Lift Motor Oper. 15" R	15'-20"	18"-24"				Opening Height +13"	Opening Height +14"
High Lift Manual	Door High +12"		24" One Side		Opening Height -Lift +30"	Opening Height +Lift +6.5"	Opening Height +Lift +7.5"
High Lift Motor Oper.							
Vertical Lift Manual	Door Height +20"		4.5"	5.5"	18"	Double Door Height +13"	
Vertical Lift Motor Oper.			24" One Side				
Low Headroom Manual	6"-15"	6"-15"	6"	9"	Opening Height +20" -26"	N/A	
Low Headroom Motor Oper.	9"-17"	9"-17"			Opening Height +66"		


NOTES:

- For low headroom, springs must be rear mount to achieve minimum headroom listed. Front mount torsion headroom depends on drum size, and varies over the range listed. See approval drawings.
- Side-room of 8" required, one side, for doors with chain hoist.
- Headroom depends on drum size, and varies over the range listed. See approval drawings.

Panel/Section Selection Guide

Door Section and Lite Selection			Door Height and Section Selection	
Door Width	Number of Panels	Maximum Number of Windows	Door Height	Number of Sections
Up to 9'2"	2	2	Up to 8'1"	4
9'3" to 12'2"	3	3	8'2" to 10'1"	5
12'3" to 16'2"	4	4	10'2" to 12'1"	6
16'3" to 19'2"	5	5	12'2" to 14'1"	7
19'3" to 24'2"	6	6	14'2" to 16'1"	8
24'3" and 26'2"	Call Factory		16'2" and Up	Call Factory

Track Selection Guide

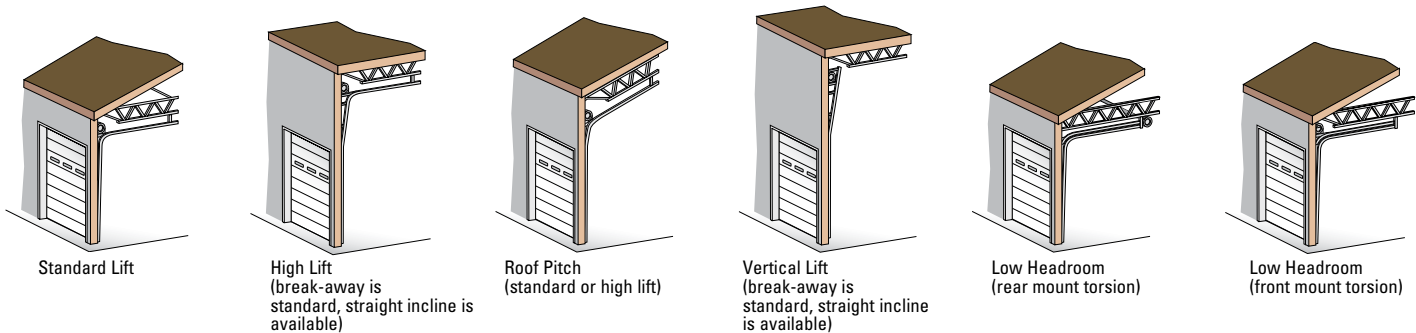

FOR TECHNICAL INFORMATION, VISIT WWW.WAYNE-DALTON.COM/COMMERCIAL

Architect Resource Center

www.wayne-dalton.com/commercial

Go to www.wayne-dalton.com/commercial and click on the Architect Resource Center. Here you will quickly find all of the specifications, drawings and documents you need to complete your project.



DISTRIBUTED BY:

©2015 Wayne Dalton, a division of Overhead Door Corporation. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. Item 332548