

A strong, smooth-working door  
with interior or exterior locking.

DS-100



*Light Commercial DS-100 Roll-Up Steel Doors*



Mini-storage buildings, loading docks and service buildings benefit from the versatility, sturdy construction, easy operation and long service life of DS-100 doors.

DS-100 roll-up doors are available in round or square profiles. The continuous curtains are made from hot-dipped galvanized steel, and then finished with silicone polyester paint for beauty and durability. Installation to masonry, steel or

wood jambs is quick, and simple—no special preparation, no overhead tracks.

Steel slide-bolt assemblies at each bottom corner secure the closed door from inside. For added security, the slide-bolts also accept padlocks. Available exterior mini curtain lock accepts two shackle locks: one for storage tenant security, the other for building owner risk-protection.

DS-100 Light Commercial Roll-Up Doors are available in sizes to 10' x 10', and a variety of standard and special colors. You get the doors you need with timely delivery and attractive pricing. Write, call or fax us for specifying/ordering information.


ONE FIRST AFTER ANOTHER.<sup>SM</sup>

# DS-100 doors combine versatility, dependability.



- 1** *Corrugated door curtain*, available in round or square profile, is hot-dipped, galvanized 26-Ga. steel, primed then finished with high gloss, silicone polyester paint.
- 2** *Polypropylene anti-wear strips* come factory-installed as continuous guides for sliding metal parts, providing quieter operation and longer service life.
- 3** *Rigid support bracket with bearings* hold constant door tension, and allow easy adjustments.
- 4** *Bottom angle assembly* includes heavy-duty steel angle, extruded aluminum bottom bar and replaceable tubular-type vinyl astragal.
- 5** *Slide-bolt assemblies* fabricated of heavy-duty steel lock the closed door from inside at the bottom corners (not shown; door has optional mini curtain lock.) For added security, both slide bolts accept padlocks.
- 6** *Roll-up door guides* are 18-Ga. galvanized steel, 2" wide. DS-100 guides install to masonry, steel or wood construction equally well.
- 7** *Automatic door stops* prevent door from rolling up past the header.
- 8** *Oil-tempered steel spring* is engineered to counterbalance different door sizes and weights for smooth, easy operation. The spring is shot peened to increase strength and add cycle life to the spring.
- 9** *Heavy-duty steel axle* supports door curtain and counterbalance system.

## 20 Year Warranty Against Chalk and Fade

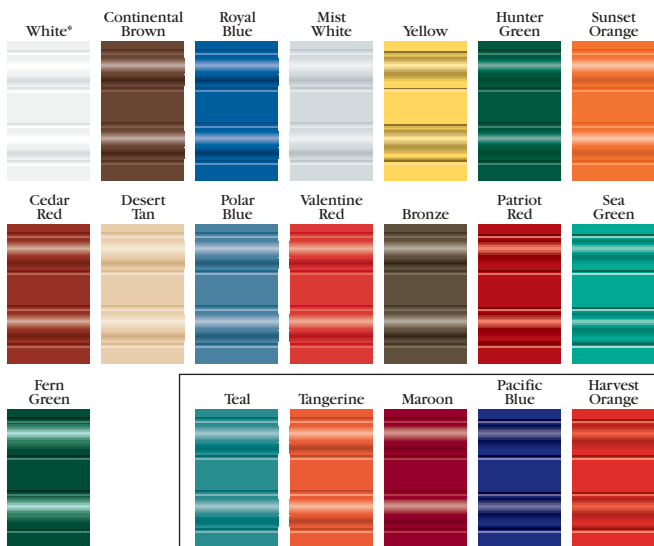

## 10 Year Warranty Against Chalk and Fade


\* White is also available in a Glossy White finish



**Optional Tension-Pro™ Adjustable Spring Device** allows adjustments to be made to the counterbalance easily and safely. No special tools are needed. No pins to align. No risk of tension being released accidentally. U.S. Patent #6,527,037



**Standard support brackets** include anti-friction bearings.



**Optional door insulation** features two layers of aluminum mylar film laminated to two



**Optional mini curtain lock** allows access from outside. Designed for owner/tenant security. Rust resistant.

layers of heavy-duty polyethylene air-bubble material. Its "R"-value of 4 helps control heat gain/loss. Includes flexible vinyl top and side draft stops as weather seals between the door and the building.

**Warranty:** Wayne-Dalton Corp. and its subsidiaries back all of their doors and fittings with a LIMITED WARRANTY against defects in materials and workmanship. Paint has a limited warranty to hold up against weather induced chipping, cracking, and peeling for 25 years. Refer to each color for the number of years warranted not to chalk or change color. A copy of this warranty is available upon request.

Because of continuing product improvements, we reserve the right to change the product specifications and designs without prior notice.



www.wayne-dalton.com