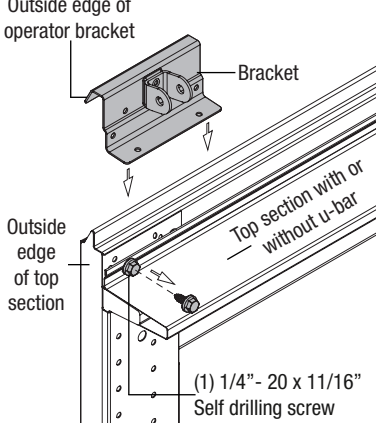
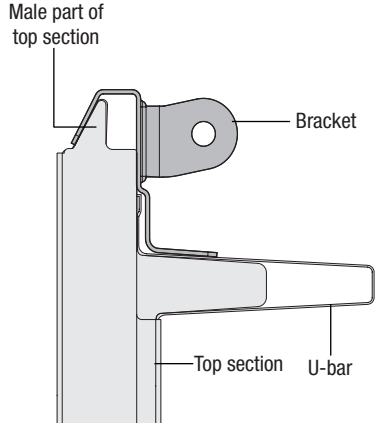
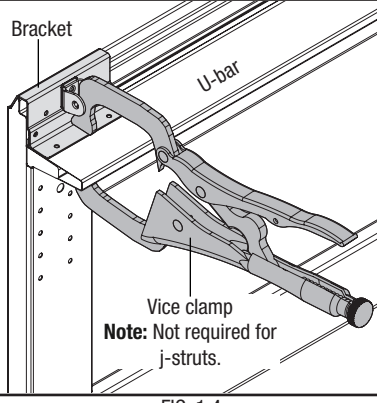
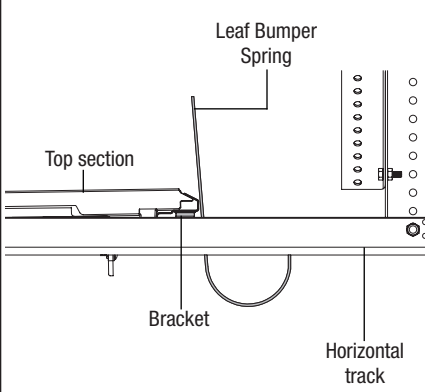
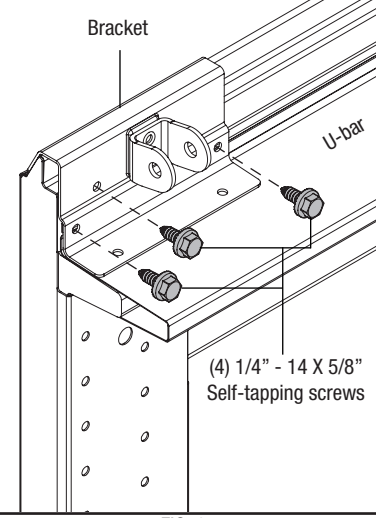
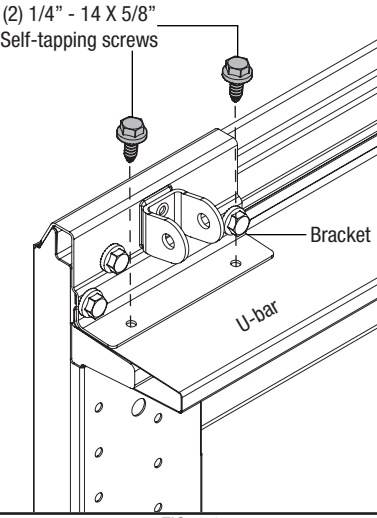


Supplemental Installation Instructions

Wayne Dalton, a division of Overhead Door Corporation
P.O. Box 67, Mt. Hope, OH 44660
www.Wayne-Dalton.com

This supplemental installation instruction is to be used as a supplement to the main Installation Instruction and Owner's Manual provided with the door. The instructions included in this document are ONLY those which deviate from the standard installation. All WARNINGS and CAUTIONS listed in the main manual are applicable to this supplemental instruction as well.

Bracket Installation			
<p>Tools Needed:</p> <ul style="list-style-type: none"> Power Drill 7/16" Socket Driver Vice Clamps Phillips Head Screwdriver Step ladder 	<p>NOTE: If you have a top section with a u-bar, you must remove (1) 1/4" - 20 x 11/16" self drilling screw from the top portion of the u-bar, as shown in FIG. 1.1.</p> <p>Starting on left hand side of top section, locate the outside edge of the top section and seat the outside edge of bracket on male part of the top section, as shown in FIG. 1.1 and 1.2.</p> <p>Install (2) #12 x 1/2" phillips head screws on the opposite side of bracket, as shown in FIG. 1.3.</p> <p>For top section with u-bar: Using a vice clamp, clamp bracket to u-bar (if furnished), as shown in FIG. 1.4. First attach (3) 1/4" - 14 x 5/8" self-tapping screws to the bracket, as shown in FIG. 1.5. Then attach (2) 1/4" - 14 x 5/8" self-tapping screws to the bracket, as shown in FIG. 1.6. Remove vice clamps and repeat the same process for the right hand side of top section.</p> <p>NOTE: When attaching bracket to top section with u-bar, apply additional pressure to thread into the u-bar.</p> <p>For top section without u-bar: Attach (5) 1/4" - 14 x 5/8" self-tapping screws to the bracket. Repeat the same process for the right hand side of top section.</p>	 <p>FIG. 1.1</p>	 <p>FIG. 1.2</p>
	<p>FIG. 1.3: Diagram showing two #12 x 1/2" Phillips head screws being installed on the opposite side of the bracket. Labels include '(2) #12 X 1/2" Phillips head screws', 'U-bar', 'Opposite side of bracket', and 'Top section'.</p> <p>FIG. 1.3</p>	 <p>FIG. 1.4</p>	
		 <p>FIG. 1.5</p>	 <p>FIG. 1.6</p>